


SAMSON

Model No. 16/4 4-Core Speaker Cable with LSHF Pink Outer Jacket

Cable is metre marked and available in 50m, 100m, 150m, 250, and 300m wooden reels

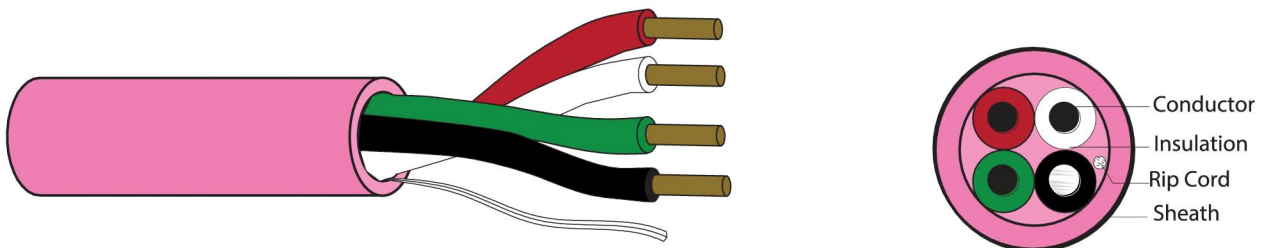

DESCRIPTION

1.5mmsq. Stranded PACW, 4 Cores, PE Insulation, Rip Cord, LSHF Sheath.

APPLICATION

For the interconnection of control equipment and instruments.

CONSTRUCTION

Conductor
Material : Plain Annealed Copper Wire
Size : 1.5mmsq.
Construction : Stranded (30/0.25mm)
Insulation
Material : PE
Nominal O.D : 2.5mm
Color : Red, White, Green, Black
Filler
Material : Rip Cord
Sheath
Material : DW9023C LSHF
Max. O.D : 7.5mm
Color : Pink

PHYSICAL PROPERTIES

Min. Bend Radius: 75mm
Operating Temperature -25°C to 90°C

ELECTRICAL PROPERTIES

Max. Conductor DC Resistance @ 20°C, 13.3Ω/km
Voltage test : Core to Core, 2.0kV a.c/1min

APPLICABLE STANDARD

EU RoHS Complies 2011/65/EU
EN 60332-1-2
EN 50575 Class Dca

CPR GRADE Dca

