



AU-D6-192

USB Digital Audio Converter (192KHz/24-bit)

/// OPERATION MANUAL

SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

REVISION HISTORY

VERSION NO.	DATE (DD/MM/YY)	SUMMARY OF CHANGE
RDV1	16/03/16	Preliminary release

CONTENTS

1. Introduction	1
2. Applications	1
3. Package Contents	1
4. System Requirements	1
5. Features	2
6. Operation Controls and Functions	3
6.1 Panel Description	3
7. Connection Diagram	4
8. Specifications	5

1. INTRODUCTION

This USB to Optical Audio Converter is a simple but smart device and no external power is required. It allows you to connect your PC/laptop to an audio amplifier or other audio destination that has a S/PDIF input without needing a dedicated audio card. This compact HD audio product supports LPCM 2.0 audio with a maximum sampling rate of 192kHz/24-bit. This unit connects to your PC/laptop using any available USB 2.0 (or higher) port (Windows and Mac OSX compatible).

2. APPLICATIONS

- High-resolution audio playback
- Improved audio quality from laptops for presentations or entertainment

3. PACKAGE CONTENTS

- HD Audio
- Driver Disk
- Operation Manual

4. SYSTEM REQUIREMENTS


- Audio source equipment such as PC/Mac/laptop with an available USB port. (Windows XP, Vista, 7, 8, 8.1, 10 (32 & 64-bit) or Apple OSX version 10.6.4 and later)
- Optical audio receiving equipment such as audio amplifiers or powered speakers.

5. FEATURES

- Output HD audio from your Laptop/PC to an audio amplifier
- USB audio processor (XMOS U8A) supporting sample rates up to 192kHz/24-bit
- Optical output module supports up to 192kHz for high resolution audio
- Simple operation and compact design
- No external power required


6. OPERATION CONTROLS AND FUNCTIONS

6.1 Panel Description

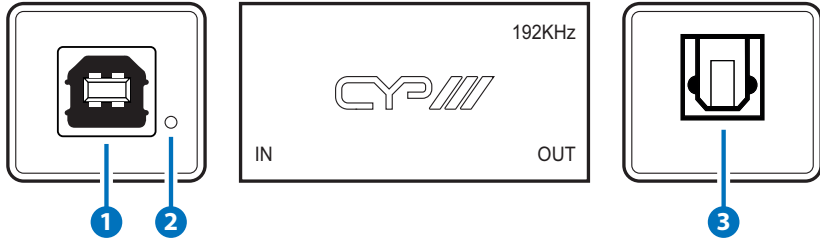

- 1 USB IN:** Connect to computer source equipment with an available USB port such as a PC/Laptop (Windows and Mac Operating Systems are compatible).
- 2 POWER LED:** This LED will illuminate RED to indicate the unit is on and receiving power from the USB connection.
- 3 Optical OUT:** Connect to powered speakers or an amplifier for digital audio output using an appropriate optical cable.

7. CONNECTION DIAGRAM

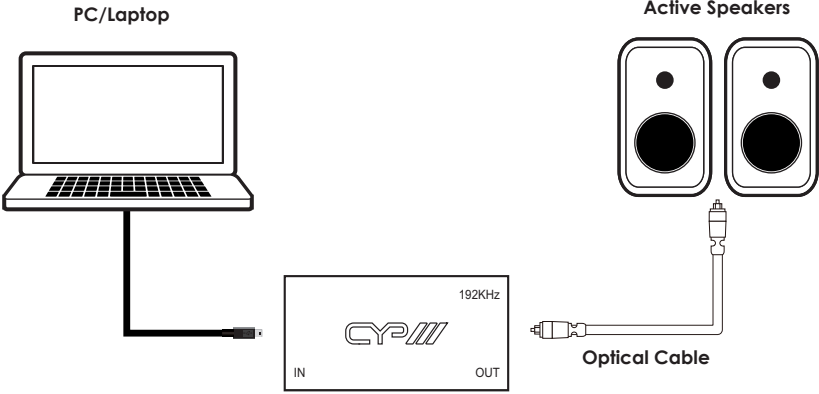

8. SPECIFICATIONS

Input Ports	1 x USB (Type B)
Output Ports	1 x Optical
ESD Protection	Human body model: ±8 kV (air-gap discharge) ±4 kV (contact discharge)
Chassis Material	Aluminum
Silkscreen color	Black
Dimensions	69mm × 22.5mm × 25mm (W×H×D) [Case Only]
Operating Temperature	0°C~40°C/32°F~104°F
Weight	48g
Storage Temperature	-20°C~60°C/-4°F~140°F
Relative Humidity	20~90% RH (non-condensing)

USB Audio Specification	
USB Audio Class	USB Audio 2.0
Format Support	LPCM 2.0: 44.1kHz, 48kHz, 88.2kHz, 96kHz, 176.4kHz, 192kHz
OS Support	Windows XP, Vista, 7, 8, 8.1, 10 (32 & 64-bit) / OSX 10.6.4 and above



CYP (UK) Ltd., Unit 7, Shepperton Business Park, Govett Avenue, Shepperton,
Middlesex, TW17 8BA

Tel: +44 (0) 20 3137 9180 | Fax: +44 (0) 20 3137 6279

Email: sales@cypeurope.com

www.cypeurope.com

RDV1