

## 6 Way 1U Slimline PDU with Surge Protection and RFI Filtration



- Protecting sensitive electronic circuits on all your IT Equipment in the Data Cabinet
- With Surge Protection and Radio Frequency Interference (RFI) Conditioning .

  RFI conditioning is sometimes known as "Filtered" and is in addition to Surge Protection
- Metal Oxide Semi-Conductors absorb any unwanted energy . Max Surge 4500 Amps
- Surge protection and Earth status light to indicate functionality
- 3 Metres mains cable with UK 13A Plug

This Device built to a very high standard and was designed to offer a *superior level of protection*. Each of the Surge Protection Components (VDR/MOV) is duplicated by putting two components in parallel. We have also included an input EMC filter to combat Radio Frequency Interference consisting of two X capacitors with a Common Mode Choke to make this a truly first class piece of equipment.

If the unit suffers a worst case strike then internal thermal fuses will blow and the green light will go out to warn you that it no longer functions.

A circuit to detect a disconnected earth will show up as a failure by the Earth Status Indicator not lighting up.

PAGE 1 of 3

#### General

Sale Unit Plain Cardboard Box Barcode 5028088011195

Commodity Code 85444219

Dimension Packed 70x145x540 Height Width Depth Dimension loose 45x482.6x45 Height Width Depth

Weight Packed 1.7kg
Weight Loose RoHS3 Compliant Yes

REACH No SVHC as of October 2019

Standard BS1363/2

## For Trade and Bulk buyers

Carton Quantity 10

Dimension 55x35x29.5cm

Weight 12kg NETT 14kg Gross

#### **Technical**


- Horizontal 19" 1U rack mounted- Protected L-N L-E N-E

- Green light "on" indicates your equipment is protected.
- Radio Frequency Interference protection (Filtrered)
- Earth Terminal a legally requirement on PDU Surge Protectors .
- On/ Off Switch
- 3 Metres 1.5mm Flexible Cable

Withstanding Surge Current 8/20uS 1 times 4500A 2 times 2500A

Energy 10/1000  $\mu s(J) 125.0$  2ms (J) 80.0

Typical Capacitance pF 420

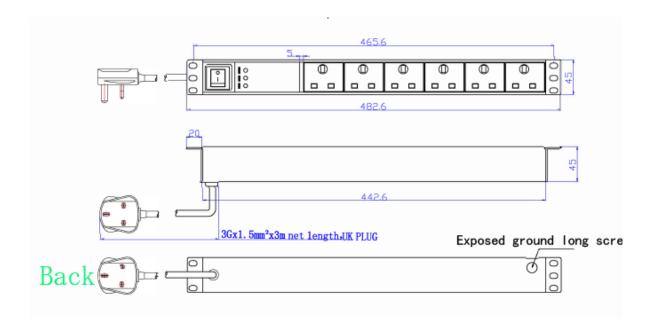

# CIRCUIT DIAGRAM FOR 3 LIGHTS SURGE PROTECTOR

