




# Structured Cable Products

Quality Installations Deserve Quality Products

www.scpcat5e.com

## SCP PART#: 14/4OFC-LSZH-XX-D

4C/14 AWG 105 STRAND OXYGEN FREE COPPER SPEAKER CABLE, LOW SMOKE ZERO HALOGEN JKT

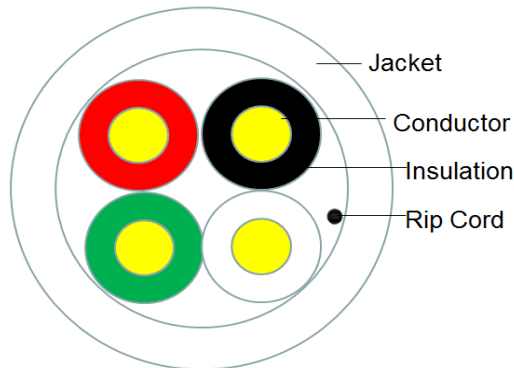

### Regulatory

EN50575: 2014 REACTION TO FIRE CLASS Dca  
EU RoHS 2011/65/EU Compliant

**Application:** Speaker cable

### Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	14AWG X 4C(2.5mm <sup>2</sup> )
	Construction	105/0.16mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.33mm
	AVG.Thickness	0.36mm
	Diameter	2.70mm +/-0.10mm
	Colors	Black & Red & White & Green
Jacket	Material	LSZH
	Min.Thickness	0.60mm
	AVG.Thickness	0.80mm
	Diameter	8.0mm +/-0.20mm
	Rip Cord	Nylon
	Color	Per request
Bend radius	Min 15D/120mm	

### Electrical & Physical Characteristics:

Operating Temperature Range	- 20°C + 75°C
Minimum installation temperature	0°C + 40°C
Conductor Resistance	Max 9.2 ohm/km at 20°C
Insulation Resistance	Min 50MΩ*km at 20°C
Dielectric Strength	Min AC1.5KV

Rated Voltage	300V		
Test Voltage	800V/min		
Impedance:			
opposite:	86 ± 5 Ω		
near by:	70 ± 5 Ω		
Capacitance:			
opposite:	19.6 ± 3pf/ft		
near by:	26 ± 3pf/ft		
<b>Marking:</b>			
STRUCTURED CABLE PRODUCTS --- 14/4OFC-LSZH --- 4C 14AWG 105 STRAND OFC SPEAKER CABLE EN50575:2014 CE Dca -s1,d1,a1 LSZH JKT RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M			
<b>Packaging:</b>			
Approx. Weight	Approx. Dimension(mm)	Package	Packages per pallet
22.5kgs/49.603lbs	270X100X300	Spool	27
	310X340X350	500ft/Reel in box	