


DALI Lighting Cable Low Smoke Non-Halogen (LSNH) White

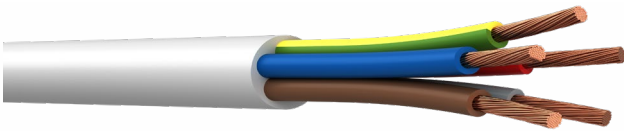

Description: DALI Lighting Cable Low Smoke Non-Halogen (LSNH) insulation, Low Smoke Non-Halogen (LSNH) White Sheath

Product Construction

Conductor Material	:	Bare Copper
Conductor Stranding	:	Class 5 to IEC / BS EN 60228
Insulation Material	:	Low Smoke Non-Halogen (LSNH), Type TI6
Sheath Material	:	Low Smoke Non-Halogen (LSNH), Type TM7
Sheath Colour	:	White
Core Colours	:	Brown, Blue, Green/Yellow, Red, White

Mechanical Characteristics

Temperature Range	Flexing	:	-5°C to +70°C
Bend Radius	:	:	6 x Overall Diameter

Electrical Characteristics

Inner Conductor DC Resistance	:	to BS EN 60228
Voltage Rating	:	300/500V

Certifications & Standards

Manufactured to	:	EN 50525-3-11	
Flame Retardancy	:	BS EN 60332-1-2	
Low Smoke	:	BS EN 61034-2	
Halogen Gas	:	BS EN 50525-1, BS EN 50267	
RoHS 3 Compliant	:	Yes	
REACH Compliant	:	Yes	
CPR Classification	CE	:	Cca s2, d2, a1 to EN 50575:2014+A1:2016
	UKCA	:	Cca s2, d2, a1 to BS EN 50575:2014+A1:2016



Part No.	Cores x mm ²	Weight kg/km	OD mm
320225C-WHT-DL	5 x 1.0	122	8.8
320235C-WHT-DL	5 x 1.5	175	10.4



Publication Date: 05/05/2022
 Revision Number: 1.0
 Written by: GB
 Authorised by: GB

Webro Cables & Connectors Ltd

Vision House, Meadow Brooks Business Park, Meadow Lane, Long Eaton, Nottingham NG10 2GD, UK

Tel: +44 (0)115 9724483 • Fax: +44 (0)115 9461230 • sales@webro.com • www.webro.com

This technical document and its information and images are intended for guidance only. Due to technical improvements, manufacturing changes or commercial factors the product may vary, and we reserve the right without notice or liability to amend the product information.