


8K Ultra High Speed

SLIMWIRE MAX (48G) HDMI CABLE



No other HDMI cable will give you better picture and sound from your 8K TV setup. Supporting the full HDMI 2.1 (a/b) 48Gbps max data rate end-to-end.

Capable of carrying the most premium ultra high speed 8K 60 4:4:4 content, along with all HDR formats (10 & 12-bit), Dolby Vision, HDR10+ and HLG.

FEATURES

HDMI® 2.1 compliant (a/b)
HDCP 2.3 compliant
Uncompressed 8K@60fps 4:4:4, 4K@120fps and 10K@30fps
Officially Certified for 48G
Static/dynamic HDR, HDR10 & Dolby Vision
21:9 screen ratio support
Enhanced Audio Return Channel (eARC)
Ethernet Channel & CEC supported
DTS Master, DTS:X, Dolby TrueHD, & Dolby Atmos Audio
Supports: VRR, ALLM, QMS, QFT
Small precision-manufactured compact aluminium headshell assembly
24K Gold Plated HDMI male connectors

SPECIFICATIONS


Available Sizes	0.5/1.65, 1/3.3, 1.5/4.9, 2/6.6, 3/9.8, 4/13.1 m/ft.
Thickness	30 AWG (5m 28 AWG) 99.9% high purity oxygen-free copper conductor
Colour	Carbonite
Conductors	OFHC (Oxygen-Free High-Conductivity) copper
Insulation (inner jacket)	High-density polyethylene (HD-PE)
Layers 1 & 2 Shielding	100% Aluminium Foil
Layer 3 Shielding	95% Al+My braid
Insulation (outer jacket)	PVC
Contacts	Gold plated
Configuration	19+1 Pin
Guarantee	5-year guarantee

LENGTHS & SKUS

0.5m / 1.65ft	1.55.917.001.1	3.0m / 9.8ft	1.55.917.005.1
1.0m / 3.3ft	1.55.917.002.1	4.0m / 13.1ft	1.55.917.006.1
1.5m / 4.9ft	1.55.917.003.1		
2.0m / 6.6ft	1.55.917.004.1		

8K Ultra High Speed

FIBRE-OPTIC MAX (48G) HDMI CABLE



No other HDMI cable will give you better picture and sound from your 8K TV setup. Supporting the full HDMI 2.1 (a/b) 48Gbps max data rate end-to-end.

Capable of carrying the most premium ultra high speed 8K 60 4:4:4 content, along with all HDR formats (10 & 12-bit), Dolby Vision, HDR10+ and HLG.

FEATURES

HDMI® 2.1 compliant (a/b)
HDCP 2.3 compliant
Uncompressed 8K@60fps 4:4:4, 4K@120fps and 10K@30fps
Officially Certified for 48G
Static/dynamic HDR, HDR10 & Dolby Vision
21:9 screen ratio support
Enhanced Audio Return Channel (eARC)
Ethernet Channel & CEC supported
DTS Master, DTS:X, Dolby TrueHD, & Dolby Atmos Audio
Supports: VRR, ALLM, QMS, QFT
Small precision-manufactured compact aluminium headshell assembly
24K Gold Plated HDMI male connectors

SPECIFICATIONS

Available Sizes	10/32.8, 15/49.2, 20/65.6 m/ft
Thickness	17.3mm/0.6in
Colour	Carbonite
Max. Bend Radius	6cm/2.36in
Max. Pull Tension	15kg/33lbs
Operating temperature	14°F ~ 122°F (-10°C ~ 50°C) 10% ~ 90%, non-condensing
Storage temperature	-4°F ~ 140°F (-20°C ~ +60°C) 10% ~ 90%, non-condensing
Insulation (outer jacket)	PVC
Contacts	Gold plated
Configuration	19 Pin
Power Supply	Passive HDMI: 5V 4.5v~5.5v VCC
Guarantee	5-year guarantee

LENGTHS & SKUS


10.0m / 32.8ft	1.55.918.002.1	15.0m / 49.2ft	1.55.918.003.1
20.0m / 65.6ft	1.55.918.004.1		

8K Ultra High Speed

8K HDMI CABLE DIMENSIONS



8K Ultra High Speed Slimwire Max (48G)

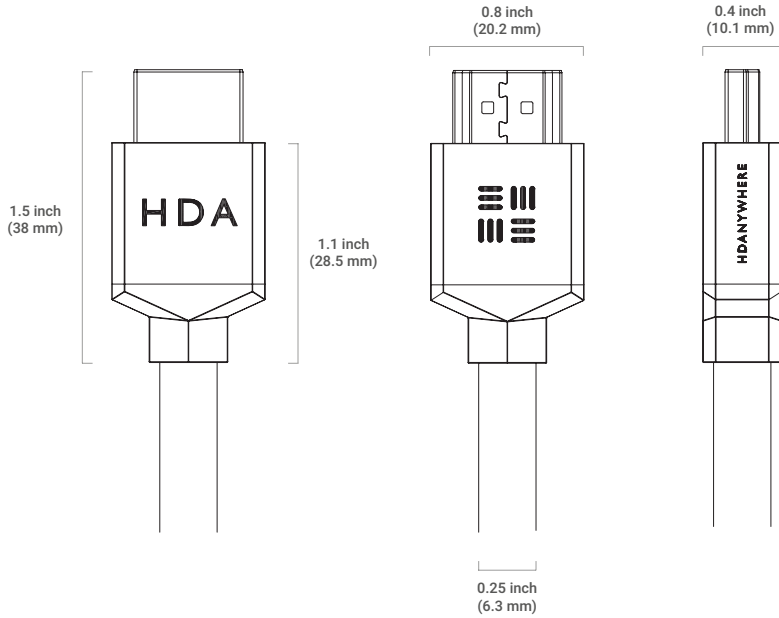

8K Ultra High Speed Fibre-Optic Max (48G)

