



REV.	REVISED DESCRIPTION	DATE	CHECKED
A1	NEW	2022.05.27	HLL

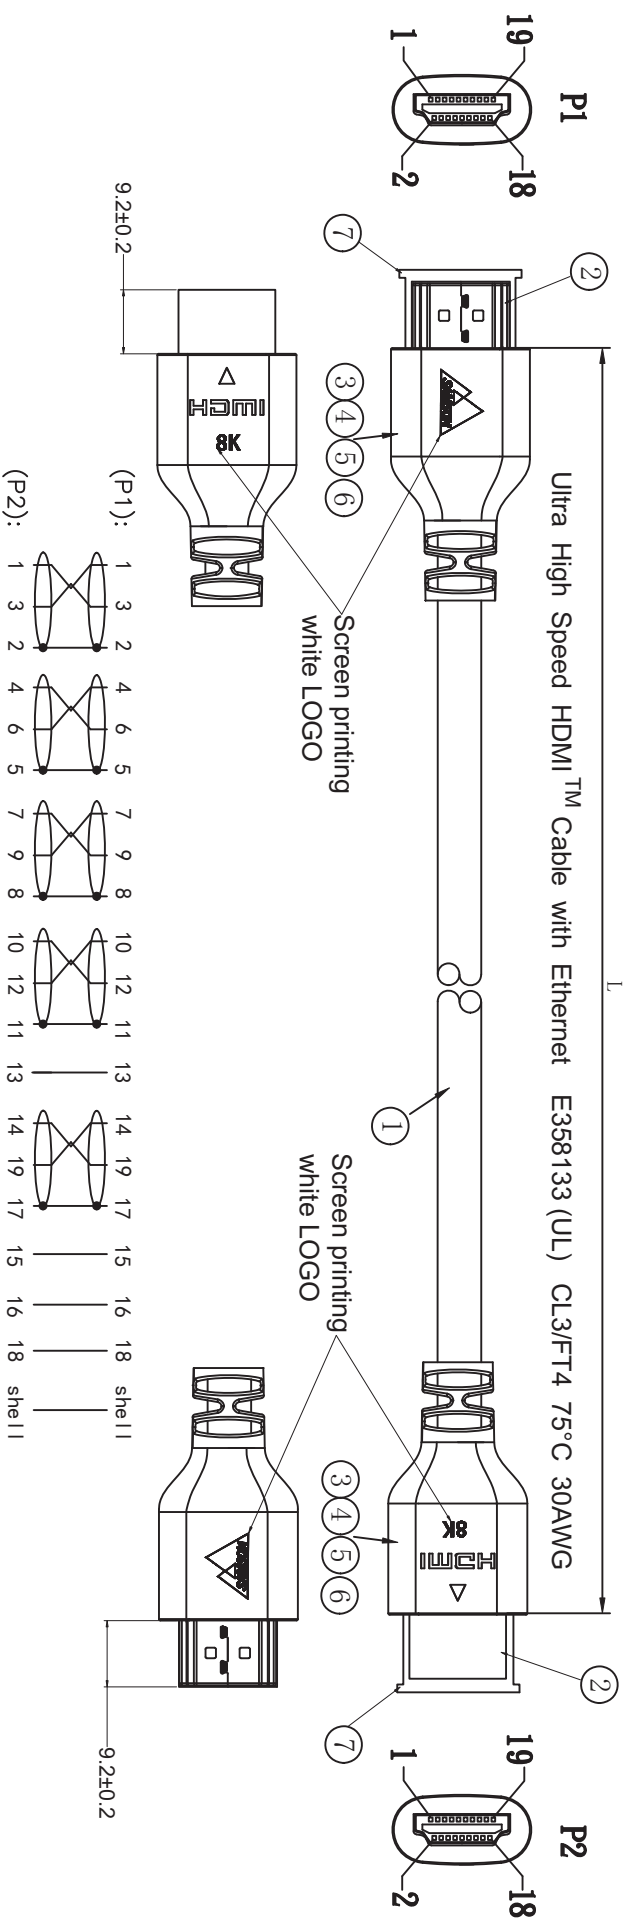

- NOTES:
1. 100% OPEN & SHORT TEST
 2. CONDUCTIVE RESISTANCE : 5 Ohms MAX
 3. INSULATION RESISTANCE : 5M Ohms MIN
 4. HI-POT : 300V DC/10ms
 5. The product is ROHS compliant.



Quantity	Description	Material	Part No.
L	The guest materials issue		
500 ± 30		HP8/05	
1000 ± 30		HP8/1	
2000 ± 30		HP8/2	

7	HDMI dirt-proof boot
6	FT4 PVC 45P Black Molding
5	PE
4	HDMI Shielding iron case version 2.1 – upper and lower cover (od6.0-6.5)
3	Two-piece bracket 30 bare wire version 1.4 - manual wiring PA66
2	HDMI 2.1 AM Iron plated nickel terminal gold plated 19 G/F p black plastic core
1	30# PVC BLACK OD6.3 CL3/FT4 (1/0.254BCX1P+1/0.254TC+AL-foil+Adhesive-PET)X5C+1/0.254BCX4C+AL-foil+7/0.16TC +144#0.12ALB1*1C
ITEM	SPECIFICATION

ITEM	SPECIFICATION
ERP NO.:	
DOC No.:	
CUSTOMER:	GJ
CUSTOMER P/N:	
DESCRIPTION	
APPROVAL	CHECKED
	DRAWN
	HLL

TOLERANCES UNLESS OTHERWISE STATED

X. = ± 1

.X = ± 0.2

.XX = ± 0.1

ERP NO.:	SAMPLE DWG NO.:
DOC No.:	REVISION
	A1
CUSTOMER:	UNIT
GJ	mm
CUSTOMER P/N:	SCALE
	NO
DESCRIPTION	PAGE NO
	1/1
APPROVAL	DATE
	2022.05.27
CHECKED	DRAWN
	HLL