



| REV. | REVISED DESCRIPTION | DATE | CHECKED |
|------|---------------------|------------|---------|
| A1 | NEW | 2022.05.27 | HLL |

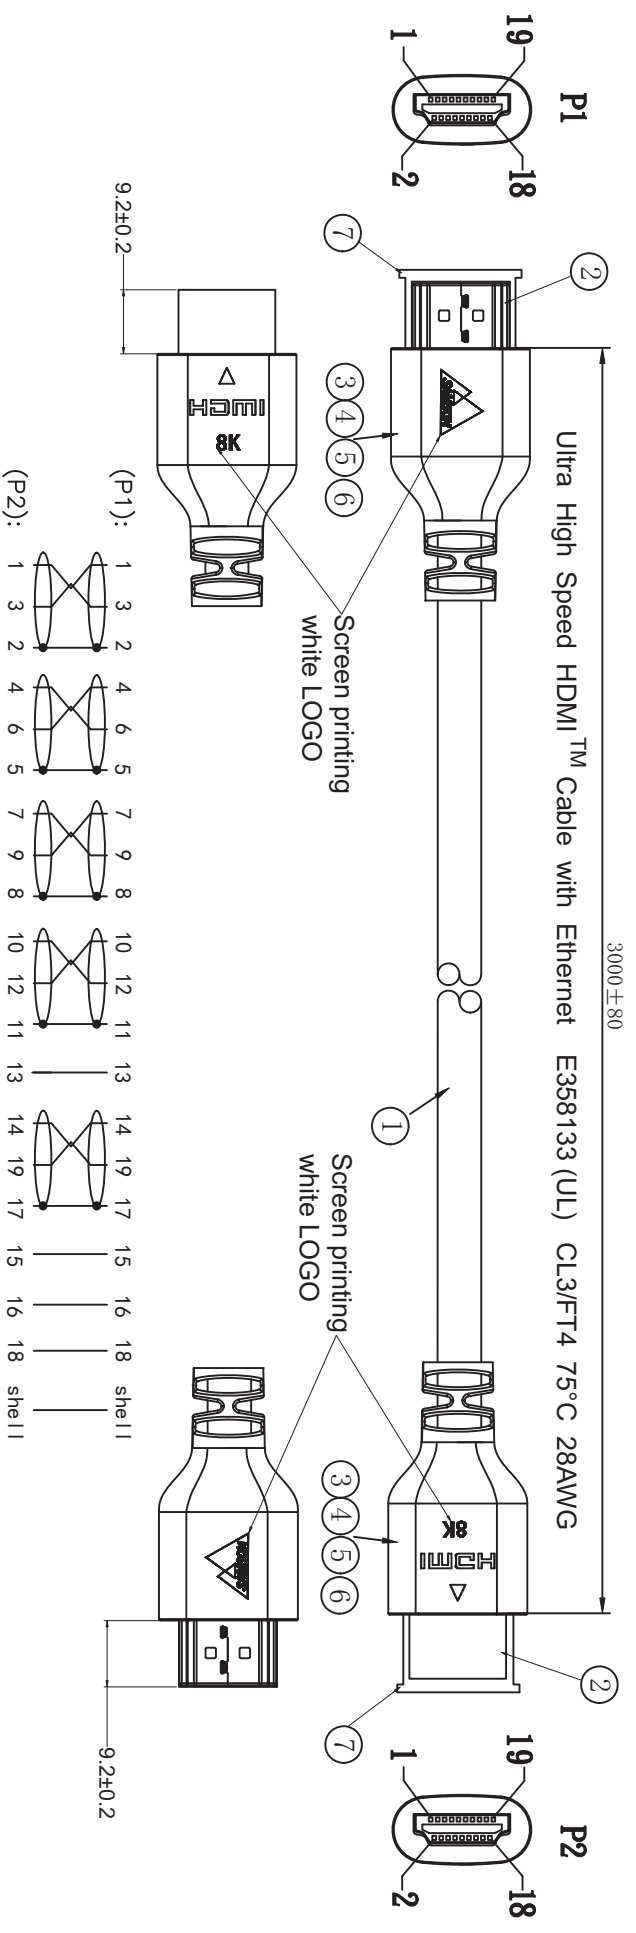

- NOTES:
1. 100% OPEN & SHORT TEST
 2. CONDUCTIVE RESISTANCE : 5 Ohms MAX
 3. INSULATION RESISTANCE : 5M Ohms MIN
 4. HI-POT : 300V DC/10ms
 5. The product is ROHS compliant.



| | |
|------|--|
| 7 | HDMI dirt-proof boot |
| 6 | FT4 PVC 45P Black Molding |
| 5 | PE |
| 4 | HDMI Shielding iron case version 2.1 – upper and lower cover (od7.0-7.5) |
| 3 | Two-piece bracket 28 bare wire version 1.4 - manual wiring PA 66 |
| 2 | HDMI 2.1 AM Iron plated nickel terminal gold plated 19 G/F p black plastic core |
| 1 | HDMI 2.1 CABLE 28+30# PVC BLACK OD7.3 CL3/FT4 (1/0.32BCX1P+1/0.254TC+AL-foil+Adhesive-(PET)X5C+1/0.32BC*1C+1/0.254BCX3C+AL-foil+7/0.16TC +160#0.12ALB*1C |
| ITEM | SPECIFICATION |

| | | | |
|------------------------------------|---------|--|------------|
| TOLERANCES UNLESS OTHERWISE STATED | | = ± 0.1 = ± 0.2 = ± 0.1 = ± 0.1 | |
| ERP NO.: | | SAMPLE DWG NO.: | |
| DOC No.: | | REVISION | A1 |
| CUSTOMER: | GJ | UNIT | mm |
| CUSTOMER P/N: | HP8/3 | SCALE | NO |
| DESCRIPTION | | PAGE NO | 1/1 |
| | | DATE | 2022.05.27 |
| APPROVAL | CHECKED | DRAWN | HLL |