


REV.	REVISED DESCRIPTION	DATE	CHECKED
A1	NEW	2022.05.27	HLL

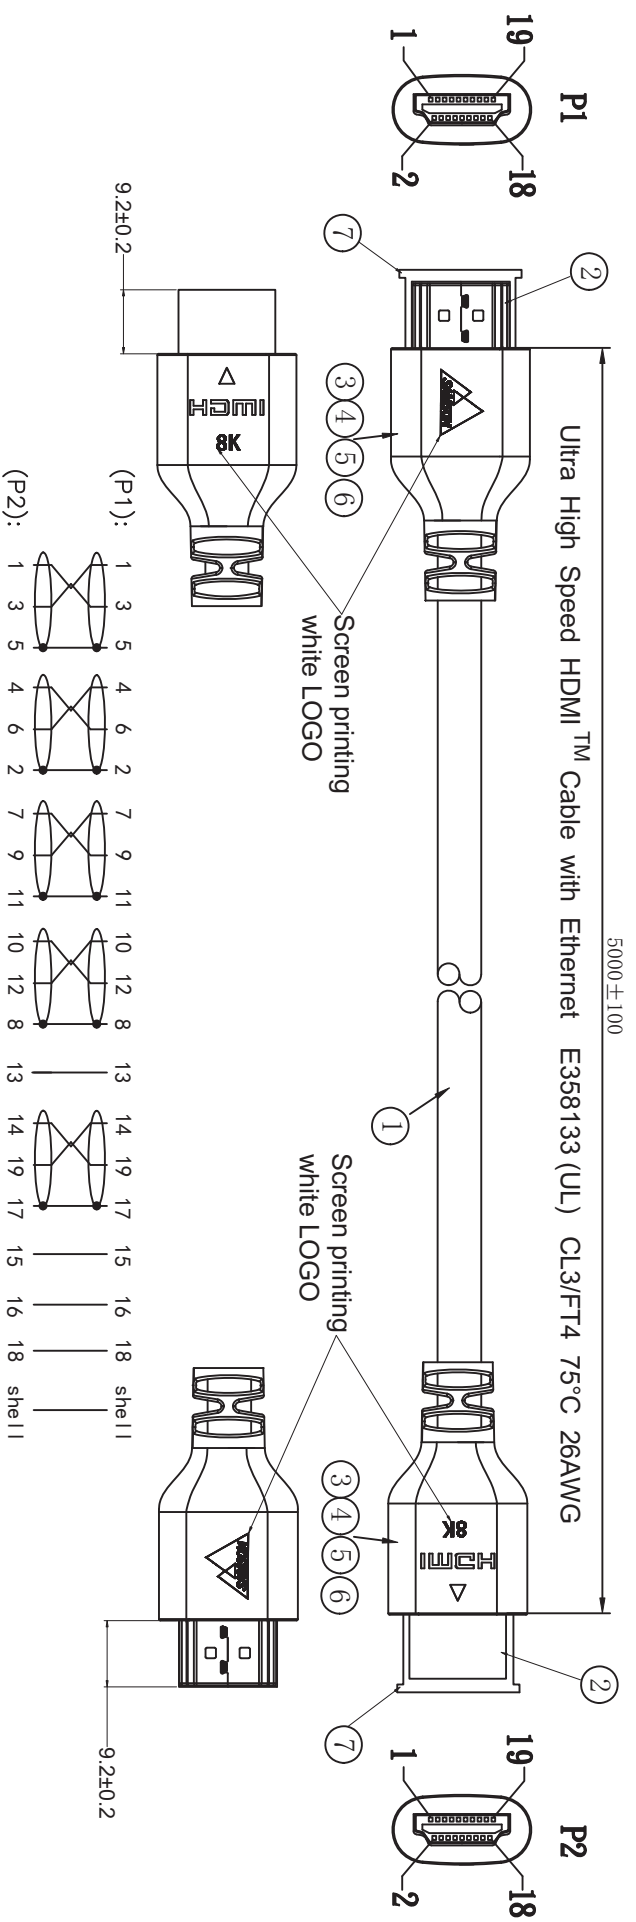

- NOTES:
1. 100% OPEN & SHORT TEST
 2. CONDUCTIVE RESISTANCE : 5 Ohms MAX
 3. INSULATION RESISTANCE : 5M Ohms MIN
 4. HI-POT : 300V DC/10ms
 5. The product is ROHS compliant.

7	HDMI dirt-proof boot
6	FT4 PVC 45P Black Molding
5	PE
4	HDMI Shielding iron case version 2.1 – upper and lower cover (od8.0-8.5)
3	Two-piece bracket 26 bare wire version 1.4 - manual wiring PA 66
2	HDMI 2.1 AM Iron plated nickel terminal gold plated 19 G/F p black plastic core
1	HDMI2.1 OD=8.5 CL3/FT4 BLACK PVC (1/0.43BC*1P+1/0.254TC+AL-foli+Adhesive-PET)*4C+ (1/0.254BC*1P+1/0.254TC+AL+Adhesive-PET)*1C+1/0.4BC*1C +1/0.254BC*3C+AL-foli+7/0.16TC+176#0.12AL-MG
ITEM	SPECIFICATION

TOLERANCES UNLESS OTHERWISE STATED			
X.	= ± 1		
.X	= ± 0.2		
.XX	= ± 0.1		
ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A1
CUSTOMER:	GJ	UNIT	mm
CUSTOMER P/N:	HP8/5	SCALE	NO
DESCRIPTION		PAGE NO	1/1
		DATE	2022.05.27
APPROVAL	CHECKED	DRAWN	HLL