

# KÄUDEN™




Item code SM317

CAT6A IDC Shielded Cable Coupler



- Enables the Joining of two shielded CAT6A RJ45 Cables
- 4 pair Insulation Displacement Connection terminals
- Used for joining CAT6A solid core cables
- With cable ties and stick pad to attach to surface
- Earth Clamp enables drain wire attachment

Frequently used in ceiling installations . Enabling the easy joining of CAT6A specification cables . Requires the use of IDC punch down tool. As the device is made to CAT6A specifications it is backwards compatible with CAT5 and CAT6 and can be used on non-shielded wires. We recommend this is only used with solid copper cable 23-24 AWG

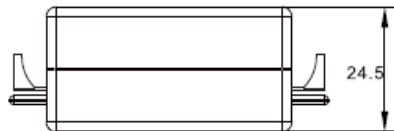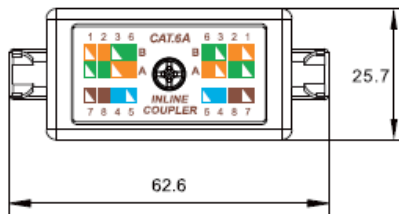

Specification:  
Material:

1. Housing: ABS,
2. IDC House: PC,
3. IDC Terminal material & finished:
  - 3-1: Phosphor Bronze with 50" Tin-Lead plated.  
over 50-60" Nickel plated.
  - 3-2: KR tool compatible.
  - 3-3: Use for 23-24AWG stranded and solid wire.

Performance:

- a. Operation Temperature: -10°C to 60°C
- b. Durability:
  - b-1. IDC: Max. 200 punching times.
- c. The Cat. 6A performance is in compliance with the ANSI-TIA/EIA-568. 2-D standard.