


Technical Datasheet

Product Code: PA135015BK

Description: C13 IEC Locking Appliance Outlet - Black

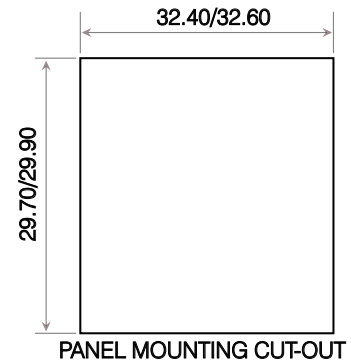

General Information

Rating	10A Max / 250V~ (Europe) 15A Max / 250V~ (cUL)
Materials	Face & Back Cover: Polyamide 66 (PA66) - To RAL Colour 9004 (Signal Black) Gloss Finish Contacts: Tin Plated Copper Alloy (CuSn5 PB102 1/2 Hard Phosphor Bronze) Push Button: Polycarbonate - To RAL Colour 3020 (Traffic Red) Spring: Steel (Zinc Plated, Clear Passivate and de-embrittle) Locking Tab: Manganese Steel 65Mn (Zinc Plated to EN 1706) 5 Microns Spring: Spring Steel Locking Blade: Spring Steel Zinc Plated Red Handle: Polycarbonate (RAL 3020 Traffic Light Red)
Panel Thickness	1.5mm
Aperture Cutout	(32.4-32.8mm) x (29.7-29.9mm)
Receptacle Size	6.3mm x 0.8mm
Insulation Resistance	100MΩ (500V DC, 1 Min)
Dielectric Strength	2KV (50Hz 1Min) to accessible surfaces
Temperature Rating	-20°C To + 70°C
Lock Retention	> 100N
Features	Fits any standard C14 connector Anti-Vibrate Integral plug retention feature Easy push button to release
Standards	IEC /BS EN 60320-1:2015 (DEKRA File NL-45977) IEC /BS EN 60320-3:2014 (DEKRA File NL-45977) UL 60320-1 (UL File E348985) UL 60320-3 (UL File E348985) CSA C22.2 60320-1-11 (UL File E348985) CSA C22.2 60320-3 (UL File E348985)

