




## LTE700 IR Pass Distn Amp 16Way

Art. Number 334096

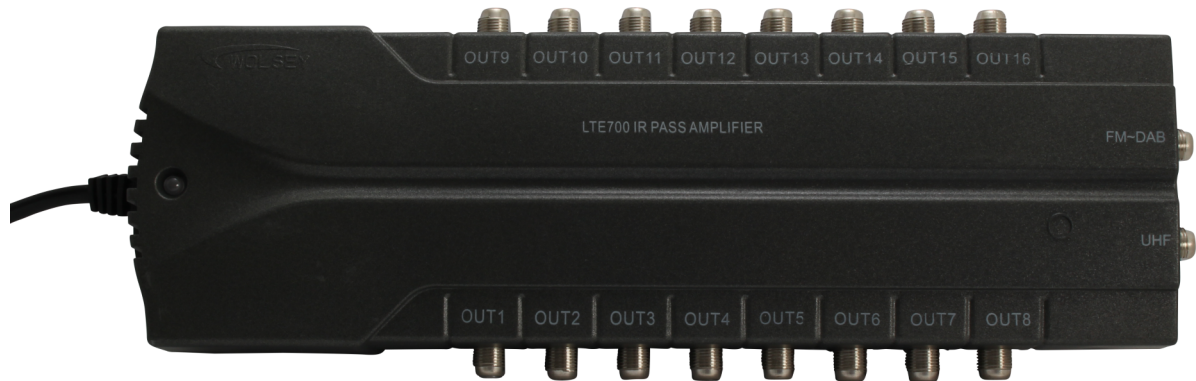

### LTE 700 16 Way IR Pass Amplifier

- LTE700 protected IR Pass Distribution Amplifier
- Distributes to multiple TV's around the home
- Allows control of Sky Digital receivers when used with TRIAX Digital Links and MOD103T Modulator
- 2 Input 16 Output
- Short circuit protected in each output
- Power on LED
- Screened housing
- F-Connectors
- Easy to mount fixing

## Technical Specifications

### ORDER INFORMATION

EAN Number 5702663340961

### CHARACTERISTICS

Max. Output level | dB $\mu$ V 94.0 dB $\mu$ V

### FREQUENCY RANGE

Output frequency range | MHz 85...694 MHz  
Frequency range UHF | MHz 470...694 MHz  
Frequency Range FM | MHz 87.5...108 MHz  
Frequency Range DAB | MHz 217...230 MHz  
Frequency range VHF | MHz 85...230 MHz

### GAIN

Gain | dB 10 +/-2 dB  
Noise figure | dB <5 dB

### ELECTRICAL

Impedance |  $\Omega$  75  $\Omega$



## Technical Specifications

### OPERATIONAL

AC Supply voltage | VAC 230  $\pm$ 10% / 50Hz VAC

### CONNECTORS

Number of inputs 2

Number of outputs 16

### MECHANICAL

Colour RAL 7016 - Anthracite grey

Packing QTY 1

Packaging Height | m 0.060 m

Packaging Width | m 0.310 m

Packaging Depth | m 0.145 m

Packaging Volume | m<sup>3</sup> 0.003 m<sup>3</sup>

Net Weight | kg 0.785 kg

Tara Weight | kg 0.140 kg

Total Weight | kg 0.925 kg

Remarks fully screened within plastic housing